




SIDE SHIFTER

www.pandasolutionsllc.com

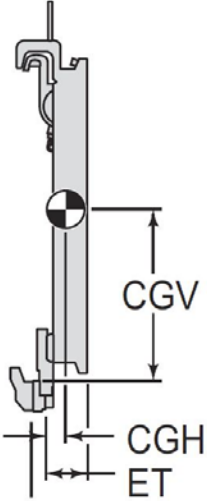

Capacity (lb) at Load Center 24"	Model	class	Sideshifting S (inch)	Carriage Width L (inch)	CGV (inch)	CGH (inch)	ET (inch)	Service Weight (lb)
5500	PSS-25M-A001	2	±3.94	38	9	1	2.36	114
5500	PSS-25M-A002	2	±3.94	39	9	1	2.36	119
5500	PSS-25M-A003	2	±3.94	40	9	1	2.36	121
5500	PSS-25M-A004	2	±3.94	41	9	1	2.36	123
5500	PSS-25M-A005	2	±3.94	43	9	1	2.36	130
7700	PSS-35M-B001	3	±3.94	43	12	1	2.60	161
7700	PSS-35M-B002	3	±3.94	45	12	1	2.60	165
9900	PSS-50M-B001	3	±3.94	47	12	1	2.60	205
9900	PSS-50M-B002	3	±3.94	54	12	1	2.60	220
9900	PSS-50M-B003	3	±3.94	60	12	1	2.60	242
14960	PSS-70M-C001	4	±5.91	47	17	2	3.54	568
14960	PSS-70M-C002	4	±5.91	53	17	2	3.54	627
14960	PSS-70M-C003	4	±5.91	60	17	2	3.54	715
14960	PSS-70M-C004	4	±5.91	73	17	2	3.54	869
20900	PSS-100M-D001	5	±5.91	71	20	2	4.33	1232
20900	PSS-100M-D002	5	±5.91	79	20	2	4.33	1309
20900	PSS-100M-D003	5	±5.91	87	20	2	4.33	1386
20900	PSS-100M-D004	5	±5.91	94	20	2	4.33	1474


* CGV: Vertical center of gravity CGH: Horizontal center of gravity ET: Effective thickness

SIDE SHIFTER

www.pandasolutionsllc.com

- ◆ Capacity from 1ton(2200lbs) to 10tons(22000lbs)
- ◆ 800mm(31.50") to 2400mm(94.49") width, class II to Class V
- ◆ 2A-3A frame is made of code extrusion bar to ensure better finish and strength
- ◆ 30% overload testing with 3 times moving speed to qualify the heavy-duty and impacting ability
- ◆ 20,000 times shifting test with overload pressure to prove non-leakage seal ability
- ◆ High durability nylon pads with oil nipples and slots offer smooth move and long time use
- ◆ Frame width available from 32" to 69" for 2A , 3A and 94" for 4A, 5A
- ◆ 1 piece of truck auxiliary valve is necessary.
- ◆ Side shift are shipped without the backrest holes if not requested
- ◆ Recommend hydraulic pipe internal diameter 8mm

4A BIG SIDE SHIFTER

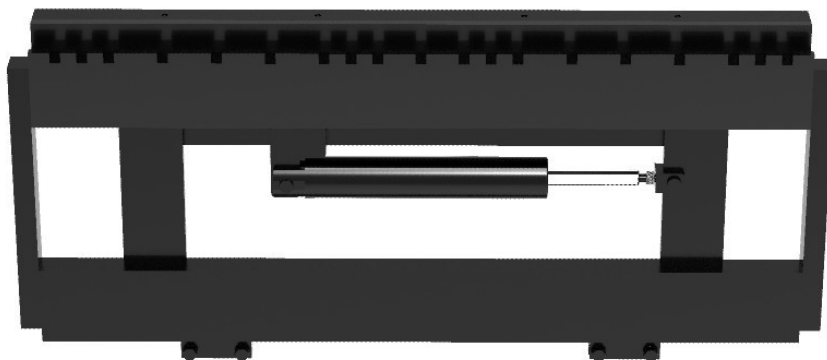

Phone: 864-491-5380 (Ext 201 / 102)

Email: sales@pandasolutionsllc.com